


NSR8000X-08 MPLS Core Router

Datasheet

Overview

NSR8000X-08 MPLS core router further implements "multicore power" on the basis of the leading "dual-core power". Based on the ATCA structure design and meeting the users' high-performance requirements, it provides the most complete dual-redundancy or multi-redundancy design for the whole system, providing users with the high reliability of enterprise-class.

With unified MyPower-R software, NSR8000X series router provides abundant routing, backup, network security services, IP multicast, QoS, network management, and other functions, supports a variety of network layer and link layer protocols, supports BGP border gateway protocol and MPLS function, and can play the PE node function in enterprise network.

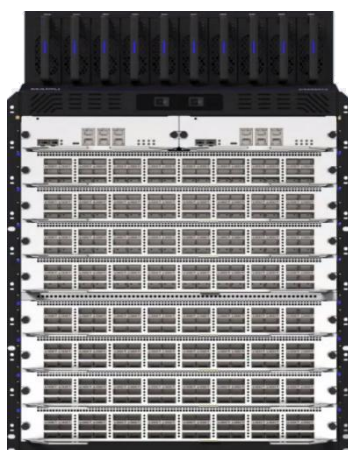

NSR8000X Core Router

As a multi-purpose universal data processing and routing platform, NSR8000X series router can cooperate with a full range of Maipu routers to provide operators, government, finance, energy, transportation, education, military and other industrial users and large/medium-sized enterprise users with a full range of WAN solutions, widely applied at the core backbone layer and core aggregation layer of the above industries. NSR8000X series core router is the next generation version of NSR8000X series which was widely deployed in many countries.

NSR8000X series core router has two models. It has two main control slots, two switching fabric slots, 8 service slots, adopts the multi-core processor to realize the distributed forwarding architecture, and supports 40G/10G/1G, and other TDM interfaces.

Key Features

- **Flexible uplink link**

NSR8000X series core router support four kinds of high-performance multi-core SPU module for customers real requirements; meanwhile, NSR8000X uplink supports various mainstream WAN access link technologies, such as 1G/10G/100G Ethernet, E1/CE1, POS/CPOS, etc.

- **More than eight expansion slots**

NSR8000X series core router is modular design which has rich expansion slots. The whole device supports 8 extended slots totally. The strong expansion ability can provide high-density access and protect customer investment. All the modules of NSR8000X support hot swap.

- **High performance**

NSR8000X series core router supports high performance and the configured ACL, QoS, have small influence for the forwarding performance. And customer can also upgrade the performance by changing SPU service engines.

- **Advanced Secure service**

NSR8000X series core router has high performance VPN aggregation function. Meanwhile, the device data can be transmitted in the secure MPLS/VPLS, IPsec, GRE, L2TP tunnel, preventing the data from being accessed and tampered and providing the higher security for the application over the network.

- **Segment routing technologies**

NSR8000X series core router fully supports SRv6 segment routing technology, supports IFIT in-flow detection, FlexE network slicing, channelized sub-interfaces, and other advanced SRv6 features. It also supports the tuning capabilities of SRv6 Policy based on latency, bandwidth, and packet loss rate, as well as the function of SRv6 Policy fault escape to SRv6 BE.

- **Rich software features**

NSR8000X series core router provides rich software features; supports various application technologies, such as IPv4/IPv6, VPN, MPLS, multicast, ACL, MAC address binding, access control, bandwidth limitation, MSTP, and NAT; supports RSVP resource reserving protocol and CAR; provides hierarchical QoS function to ensure the high priority of the key services; support the queue management policies, such as FIFO, PQ, CQ, FQ, WFQ, CBWFQ, and LLQ.

- **Rich Management modes**

NSR8000X series core router supports complete management modes, including SNMPv1/v2c/v3, CLI, USB drive deployment, MIB, RMON, SYSLOG, TR069, IPFIX, etc. Combine with Maipu SNMP Management Platform, it can provide the simple and easy-to-use remote network management.

Product Specifications

Hardware specification	NSR8000X-08	
Architecture	CLOS	
Flash (Default)	8G	
Memory (Default/Max.)	8G/64G	
Control Engine Slots (MPU)	2	
Switching Fabric Slots (SFU)	6	
Service Module Slots (SPU)	8 (32*Sub Slots)	
SPU Performance (1400Byte)	SPU05: 35Gbps	SPU20: 100Gbps
Total Throughput (1400Byte)	280Gbps (8*SPU05)	800Gbps (8*SPU20)
IPsec VPN Tunnel	4000-5000	
Power Supply Slots	10	
Fan Slots	3	
Dimension (mm)	W*H*D: 442*690*830mm(15U)	
Input Voltage	AC 100-240V 50-60HZ	
Temperature	Work temperature: 0-50℃	
	Storage temperature: -40-70℃	
Humidity	Work humidity: 10%-95%	
	Storage humidity: 5%-95%	
Cooling	Forced air cooling	
Software features		
Link-layer Protocol	PPP, PPPoE, Frame-Relay, Bridge, HDLC, VLAN, QinQ, LLDP	
TCP/IP Protocol	IPv4/IPv6 Dual Stack, DHCPv4/DHCPv6, DDNS/DNS	
Routing Protocol	Static Route/Static Routev6, RIP/RIPng, OSPFv2/OSPFv3, BGP/BGP4+, IS-IS/IS-ISv6, IRMP, PBR	
SRv6 Protocol	ISIS for SRv6, OSPFv3 for SRv6, BGP for SRv6, SRv6 BE, SRv6-TE Policy, IFIT in-flow detection	
Network Slicing	Flexible Ethernet (FlexE), Channelized Subinterface Technology	
Security Protocol	Support ACL security filtering, PPP encryption, CPU protection, Port security, AAA, IKE, PKI, Anti-attack, NAT/NAT64/NAT66	
VPN Protocol	MPLS, LDP, L2VPN, L3VPN, MPLS QoS, MPLS OAM, 6PE, GRE/GREv6, IPsec, L2TPv2, L2TPv3, VRF, IPsec, VxLAN, EVPN	

QoS Protocol	FIFO, PQ, FQ, WFQ, CBWFQ, LLQ, RSVP, CAR, H-QoS, traffic shaping, Rate Limitation
Multicast Protocol	IGMP, MLD, PIM-SM/SSM, PIM-DM/SDM PIMv6-SM/SSM, MSDP, MVPN, NG-MVPN
Virtualization	Flexible Network Service (FNS), Multi-Active Detection (MAD)
Reliability	Backup interface, VRRP/VRRPv3, VBRP, Track, IP/IPv6/LDP/TE FRR, BFD For Static/OSPF/BGP/ISIS/VRRP/LDP/TE, Forward Error Correcting (FEC)
Management & Monitoring	Keepalive gateway, NTP, Mirroring, RMON, CWMP, Netconf, CLI, SSH, SNMP V1/V2/V3, Telnet, PING, Trace Route, FTP/TFTP, IPFIX, IP-SLA

Order Information

NSR8000X-08	
Product Model	Description
NSR8000X-08	NSR8000X-08 Chassis, 2 control engine slots, 6 switching fabric slots, 8 line card slots, 3 Fan slots, 10 power slots
Fan Module	
FAN-16A-01B	FAN Module for NSR8000X-08
Power Module	
AD3000M-HS0F	3000W AC Power Module for NSR8000X-08
Power Shelf	
PEM-AC06-A	The Power Shelf for AC Power Module
PEM-DC06-A	The Power Shelf for DC Power Module
Control Engine (MPU)	
NRM8-MPU	NSR8000X-08 Control engine, one console port, one DC0 management Ethernet port, one USB port
Switching Fabric (SFU)	
NRM8-SFU-08A	Switching Fabric for NSR8000X-08
Service Mother Board (SPU)	
NRM8-SPU05	NSR8000X-08 Standard Service processing module, support 4*NRM8 daughter module slots
NRM8-SPU20	NSR8000X-08 Enhanced Service processing module, support 4*NRM8 daughter module slots
NRM8 WAN Daughter Module (Need to insert into SPU mother board)	
NRM8-10GET	10-port 1000M Base-T WAN Module (Note: need insert into SPU mother board)
NRM8-10GEF	10-port 1000M SFP WAN Module

	(Note: need insert into SPU mother board)
NRM8-4XGEF	4-port 1/10G SFP+ WAN Module (Note: need insert into SPU mother board)
NRM8-10XGEF	10-port 1/10G SFP+ WAN Module (Note: need insert into SPU mother board)
NRM8-1QFP	1-port 40/100G QSFP28 WAN Module (Note: need insert into SPU mother board)
NRM8-8E1	8-port non-channelized E1 WAN Module (Note: need insert into SPU mother board)
NRM8-8CE1	8-port channelized E1 WAN Module (Note: need insert into SPU mother board)
NRM8-4POS-OC3	4-port OC3 non-channelized POS WAN Module (Note: need insert into SPU mother board)
NRM8-4POS-OC12	4-port OC12 non-channelized POS WAN Module (Note: need insert into SPU mother board)
NRM8-2POS-OC48	2-port OC48 non-channelized POS WAN Module (Note: need insert into SPU mother board)
NRM8-1CPOS-OC3	1-port OC3 channelized POS WAN Module (Note: need insert into SPU mother board)
NRM8-2CPOS-OC3	2-port OC3 channelized POS WAN Module (Note: need insert into SPU mother board)

All rights reserved. Printed in the People's Republic of China.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written consent of Maipu Communication Technology Co., Ltd.

Maipu makes no representations or warranties with respect to this document contents and specifically disclaims any implied warranties of merchantability or fitness for any specific purpose. Further, Maipu reserves the right to revise this document and to make changes from time to time in its content without being obligated to notify any person of such revisions or changes.

Maipu values and appreciates comments you may have concerning our products or this document. Please address comments to:

Maipu Communication Technology Co., Ltd

No.16, Jiuxing Avenue

High-tech Park

Chengdu, Sichuan Province

P. R. China

610041

Tel: (86) 28-65544850,

Fax: (86) 28-65544948,

URL: [http:// www.maipu.com](http://www.maipu.com)

Email: overseas@maipu.com

All other products or services mentioned herein may be registered trademarks, trademarks, or service marks of their respective manufacturers, companies, or organizations.