

NSS7830-09C 400G Data Center Switch

Datasheet

Product Overview

NSS7830-09C is Maipu new generation 400G VxLAN switch designed for AI computing data center, providing high-throughput, high-density 25G/100G/200G/400G interfaces, larger buffer and lower latency. By using Maipu MyPowerOS software platform, NSS7830-09C provide rich data center service features and management capability.

NSS7830-09C realize large buffer of the interfaces, meeting the burst flow forwarding without packet loss; provide the M-LAG technology for virtualization scenarios; provide the modular power and fan design for high reliability. The key components adopt "overvoltage" designs to ensure that the product has the strong ability of continuous operation.

The NSS7830-09C adopts advanced hardware architecture with up to 32*400GE ports. It can work together with NSS5830/5930 VxLAN leaf switches to build a complete, scalable, virtualized fabric network that meets the data center requirements.

NSS7830-09C supports 1*Control engine slot, 1*Multi-service slot, 8*Service slots, 4*Power slots, 5*Fan slots.



NSS7830-09C 400G Data Center Switch

Key Features

- **High-density 25G/100G/200G/400G Ports**

The NSS7830-09C adopts advanced hardware architecture with up to 128*10/25G, 128*40/100G, 64*200G, 32*400G interfaces in compact 4U device. The port combination fully satisfies the interface density requirement of data center scenarios. architecture.

- **RoCEv2 Lossless Ethernet Technology**

The NSS7830-09C supports lossless Ethernet (RoCEv2) features such as Priority-based Flow Control (PFC) and Explicit Congestion Notification (ECN) control algorithms which can avoid packet loss and message retransmission that may occur in traditional Ethernet protocols when encountering network congestion, reduce network latency and jitter, and thus achieve higher performance and lower latency.

- **M-LAG for Cross-device Link Aggregation**

The NSS7830-09C supports multi-chassis link aggregation group (M-LAG), which enables links of multiple switches to aggregate into one to implement cross-device link backup. The rest of switches in the M-LAG group are working actively regardless any switch failure. During the upgrade, other switches in the system take over traffic forwarding to ensure uninterrupted services.

- **VxLAN for Layer2 Virtualized Deployment**

The NSS7830-09C can work with the industry's mainstream virtualization platforms and acts a hardware gateway on an VxLAN overlay network. Virtual extensible LANs (VxLAN), a common network virtualization overlay protocol that expands the layer 2 network address space from 4,000 to 16 million. NSS7830-09C supports BGP-EVPN, which is used as the overlay control plane and provides virtual connectivity between different layer 2/3 domains over an IP or MPLS network.

- **Telemetry for Intelligent OAM**

The NSS7830-09C provides telemetry technology to collect device data in real time and send the management data to customer network analyzer platform. Telemetry systems, done properly, play an important role in providing you with information about the health of your network, so you can respond intelligently to prevent hardware failure and network downtime. It can help customers to identify and analyze network problems which affect user experience.

- **Netconf & Restconf API Integration**

The NSS7830-09C supports NETCONF and Restconf API and can work with 3rd party SDN controller for simplified device remote configuration.

- **Reliable Hardware Design**

The NSS7830-09C uses a standard airflow design which isolates cold air channels from hot air channels. This design improves heat dissipation efficiency and meets design requirements of data center. It adopts hot swap

redundant power modules and fans which ensure hardware reliability and non-stopping operation. The fan speed can be adjusted dynamically based on system workload.

- **Free Licensing Policy**

Maipu always insists on “One-time investment” free license policy, the standard features and advanced features will be never divided to different version. For any new firmware version, Maipu will share to customers without extra charge. Compared with other manufacturers, Maipu free license policy can better protect users' short-term and long-term investment.

Technical Specifications

Product Model	NSS7830-09C
Hardware Specification	
Control Engine Slots	1
Multi-Service Slots	1
Service Card Slots	8
Service Line Card	16-Port 25G SFP28 Line Card or 16-Port 100G QSFP28 Line Card or 8-Port 200G QSFP56 Line Card or 4-Port 400G QSFP-DD/QSFP112 Line Card
Management Interface	One console port, one management Ethernet port, one USB interface
Switching Capacity	25.6Tbps
Flash	8G
Memory	8G(Default)
Interface Buffer Size	64M
Jumbo Frame	12K
VLAN Entry	4094
Max. MAC Address Entry	448K
Max. ARP Entry	251K
Max. IPv4 Routing Entry	768K
Max. IPv6 Routing Entry	384K
Max. VRF Entry	4K
VRRP Group	255
Max. ECMP Path	128
IGMP Group	8K
VxLAN VTEP Instance	8K
Power Supply Slots	4
FAN Module Slots	5
Power Supply	Input voltage (AC): 100V ~ 240V, 50Hz ~ 60Hz Input voltage (DC): -40 ~ -72V
Temperature	Work temperature: 0°C to 50°C Storage temperature: -40°C to 70°C
Humidity	Work humidity: 10% to 90%, no-condensing Storage humidity: 5% to 95%, no-condensing
Power Consumption	1883W
Dimension(W*D*H)	442mm*690mm*177mm
MTBF	>200, 000 hours
Software Specification	


	Interface	Port Type UNI/NNI, Port Speed, Port MTU, Port Loopback, Loopback interface, Tunnel interface, Null interface, VXLAN interface
Standard L2 Protocol	Ethernet Switching	LACP Link aggregation, LACP Port Priority, LACP Load Balance, LACP Rate Monitor, LACP Debug, Port isolation, QinQ, VLAN mapping, Super VLAN, PVLAN, Voice VLAN, STP, RSTP, MSTP, Loopback-detection, Error-disable, VIST/VIST+, GVRP, MLAG, MLAG Lite, VLAN isolation
Standard L3 Protocol	IP Protocol	ARP, DHCP, DHCPv6, DHCP Server, DHCPv6 Server, DHCPv6 Client, DHCP Relay, DHCPv6 Relay, DHCP Option82, DNS, GRE, IPIP, IPv6 over IPv4, ISATAP, IPv4 over IPv6, IPv6 over IPv6
	Routing Protocol	Static route for IPv4&IPv6, RIPv1/v2, RIPng, OSPFv2, OSPFv3, IS-IS, IS-ISv6, BGP, BGPv6, Policy Route, MP-BGP
Multicast	L2 Multicast	IGMP Snooping, IGMP Snooping over VxLAN, multicast VLAN (MVR, MVP), MLD Snooping, Router-alert Option
	L3 Multicast	IGMPv1/v2/v3, MLDv1/v2, PIM-SM, PIM-DM, PIM-SSM, IPv6 PIM-SM, IPv6 PIM-SSM, MSDP, IGMP Group Filter, MLD Group Filter
QoS & ACL	QoS	802.1p, DSCP, Priority Mapping, SP, WRR, WDRR, SP+WRR, SP+WDRR, WRED, Flow classification, Traffic monitoring, Traffic shaping, Congestion management, Congestion avoidance, Flow-based mirroring
	ACL	Standard IP ACL, extended IP ACL, standard MAC ACL, extended MAC ACL, extended Hybrid ACL, Standard IPv6 ACL, extended IPv6 ACL
Data Center Feature	Basic Feature	TRILL, VXLAN, M-LAG, MLAG for VXLAN, VXLAN QoS, ESI Multi-Homing, BGP-EVPN, NLB
	RoCEv2	ECN, EQCN, ETS, PFC, iNOF, DCBX
MPLS L2/L3 VPN	L3 MPLS VPN	MPLS LDP, MPLS GR, M-VRF, MPLS L3VPN, Inter-AS MPLS VPN Option A/B, MPLS OAM, IPv6 MPLS L3VPN, MPLS TE, MPLS QoS
	L2 VPLS VPN	VPWS, Martini/Kompella VPLS, H-VPLS
Precision Time Protocol (PTP)	IEEE 1588v2	E2ETC, P2PTC
Virtualization	VST	H-VST, M-VST
	MAD	MAD LACP, MAD BFD, MAD Fast-hello
Security & Network Reliability	Security	ARP Check, AARF, AARF ARP-Guard, CPU Protection, Port Security, IP Source Guard, IPv6 Source Guard, ND-Snooping, DHCP Snooping, DHCPv6 Snooping, Dynamic ARP Inspection (DAI), AARF, Host Guard, P2P MACSec, PPPoE+, 802.1x, Portal Authentication, Anti-attack detect drop flood log, URPF
	AAA	Authentication, Authorization, Accounting, Radius, TACACS+
	Network Reliability	HA, ULFD, ERPS, ULPP, Monitor Link, VRRP, VRRPv3, VBRP, BFD, EEP, CPU protection
Management	Network Management	SNMP v1/v2/v3, MIB, RMON, SYSLOG, CLI, Telnet, SSH, HTTP/HTTPS, FTP/TFTP, Debug, NTP, Keepalive Gateway
	Network Monitoring	SPAN, RSPAN, ERSPAN, VLAN SPAN, IPFIX, sFlow, LLDP, LLDP-MED, IP-SLA, CWMP, Telemetry, OpenFlow, Netconf, Restconf, BSM, MOD, Capture Packet

Order Information

Product Model	Description
NSS7830-09C Series Host	
NSS7830-09C	NSS7830-09C chassis, 1*Control engine slot, 1*Multi-service slot, 8*Service slots, 5*Fan slots, 4*Power slots
Service Line Card	
NSM7-16MQS	16-Port 100GE QSFP28 Interfaces line card (Note: it can configure to 4-Port 400GE QSFP112/QSFP-DD or 8-Port 200GE QSFP56 Interfaces)
NSM7-16FP	16-Port 10/25GE SFP28 interfaces line card
Power Modules	
AD1300M-HV1B	CPRS AC Power Supply, AC input 200~240V/8A, output 12V/1300W, or AC input 100~127V/12A, output 12V/1000W, current sharing, supporting hot-swap, Air front in rear out. (Note: Need work together with FAN-04A-01B)
AD1300M-HV0F	CPRS AC Power Supply, AC input 200~240V/8A, output 12V/1300W, or AC input 100~127V/12A, output 12V/1000W, current sharing, supporting hot-swap, Air rear in front out. (Note: Need work together with FAN-04A-01F)
DD1300M-5V1B	CPRS DC Power Supply, DC input -40~-72V/40-22A, output 12V/106A current sharing, supporting hot-swap, Air front in rear out. (Note: Need work together with FAN-04A-01B)
DD1300M-5V0F	CPRS DC Power Supply, DC input -40~-72V/40-22A, output 12V/106A current sharing, supporting hot-swap, Air rear in front out. (Note: Need work together with FAN-04A-01F)
FAN Modules	
FAN-04A-01B	FAN-04A-01B FAN Module, Hot-swappable, Air front in rear out
FAN-04A-01F	FAN-04A-01F FAN Module, Hot-swappable, Air rear in front out
Fiber Transceivers	
QSFP28-M1-M1920C8D	100Gbps QSFP28, 850nm, 70m(OM3), 100m(OM4), MPO, SR4, DDM, Multi-Mode
QSFP28-M1-100G-LD3-S	100Gbps QSFP28, 1310nm, 100m, LC, LX4, DDM, Multi-Mode
QSFP28-S1-100G-LD7	100Gbps QSFP28, 1310nm, 2Km, LC, CWDM4, DDM, Single-Mode
QSFP28-S1-L1920C3D	100Gbps QSFP28, 1310nm, 10Km, LC, LAN-WDM, DDM, Single-Mode
QSFP28-S4-100G-LD7	100Gbps QSFP28, 1550nm, 40km, LC, LAN-WDM, DDM, Single-Mode
Q56-200G-SR4-MM	200Gbps QSFP56, 850nm, 100m(OM4), MPO, SR4, DDM, Multi-Mode
Q56-200G-FR4-LS	200Gbps QSFP56, 1310nm, 2km(OS1), LC, FR4, DDM, Single-Mode
Q112-400G-VR4-MMA	400Gbps QSFP112, 850nm, 50m(OM4), MPO12-APC, VR4, DDM, Multi-Mode
QDD-400G-SR8-MMA	400Gbps QSFP-DD, 850nm, 100m(OM4), MPO, DDM, SR8, Multi-mode
QDD-400G-FR4-LS	400Gbps QSFP-DD, 1310nm, 2Km(OS1), LC, DDM, FR4, Single-mode
AOC Cables	
QSFP28-STACK-AOC100	QSFP28 AOC cable, QSFP28 to QSFP28, 100G, 10 meters length
QSFP28-STACK-AOC200	QSFP28 AOC cable, QSFP28 to QSFP28, 100G, 20 meters length

Typical Application

RoCEv2 Lossless Ethernet Solution for Data Center

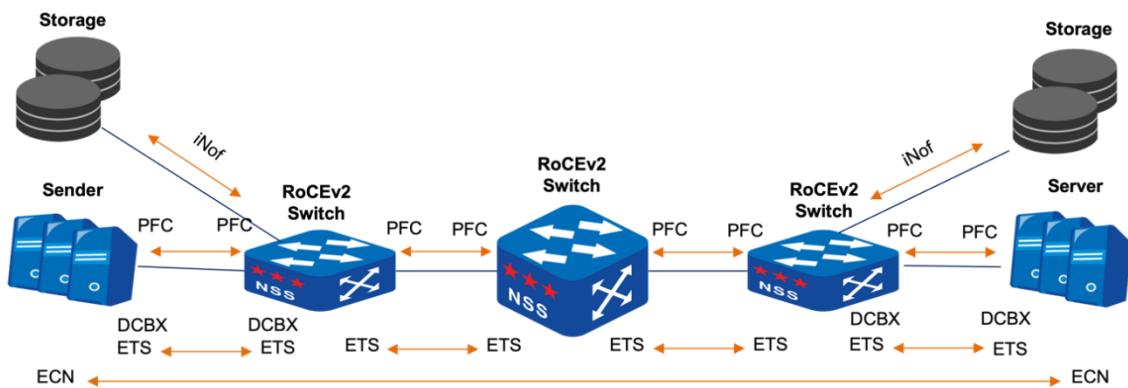

RoCEv2 is a network protocol that enables servers in data centers to perform Remote Direct Memory Access (RDMA) directly over Ethernet. RoCEv2 benefits significantly from a lossless Ethernet environment because it relies on high reliability and low latency for performance efficiency. Lossless Ethernet technology ensures that RoCEv2 can deliver its full potential benefits by avoiding the typical challenges associated with standard Ethernet communications.

NSS7830 series fully support the RoCEv2 standards, meeting the requirements for switch performance in high-performance data center scenarios. The NSS7830 supports a wide range of lossless Ethernet technologies, including ETS, PFC, ECN, DCBX, etc. This helps create an end-to-end, zero-jitter, low-latency, lossless Ethernet network that meets the demands of cloud computing, big data, artificial intelligence, and high-performance computing deployments in data centers.

All rights reserved. Printed in the People's Republic of China.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written consent of Maipu Communication Technology Co., Ltd.

Maipu makes no representations or warranties with respect to this document contents and specifically disclaims any implied warranties of merchantability or fitness for any specific purpose. Further, Maipu reserves the right to revise this document and to make changes from time to time in its content without being obligated to notify any person of such revisions or changes.

Maipu values and appreciates comments you may have concerning our products or this document. Please address comments to:

Maipu Communication Technology Co., Ltd

Maipu Mansion, No.16, Jiuxing Avenue

High-tech Park

Chengdu, Sichuan Province

P. R. China

610041

Tel: (86) 28-65544850,

Fax: (86) 28-65544948,

URL: <http://www.maipu.com>

Email: overseas@maipu.com

All other products or services mentioned herein may be registered trademarks, trademarks, or service marks of their respective manufacturers, companies, or organizations.